



PODIUM

Curved LED Display Counter

Assembled, Stocked & Supported in USA



High Definition



Plug & Play



GOB Protection



Flexible Mobility




COMPANY INFORMATION

DreamWall Headquarters & Showroom
8720 Westpark Drive, Houston, TX 77063
Phone: (713) 730-9566
Email: sales@dreamwall.net
Web: www.dreamwall.net

LATEST TECH



GOB With Advanced Encapsulation Technology

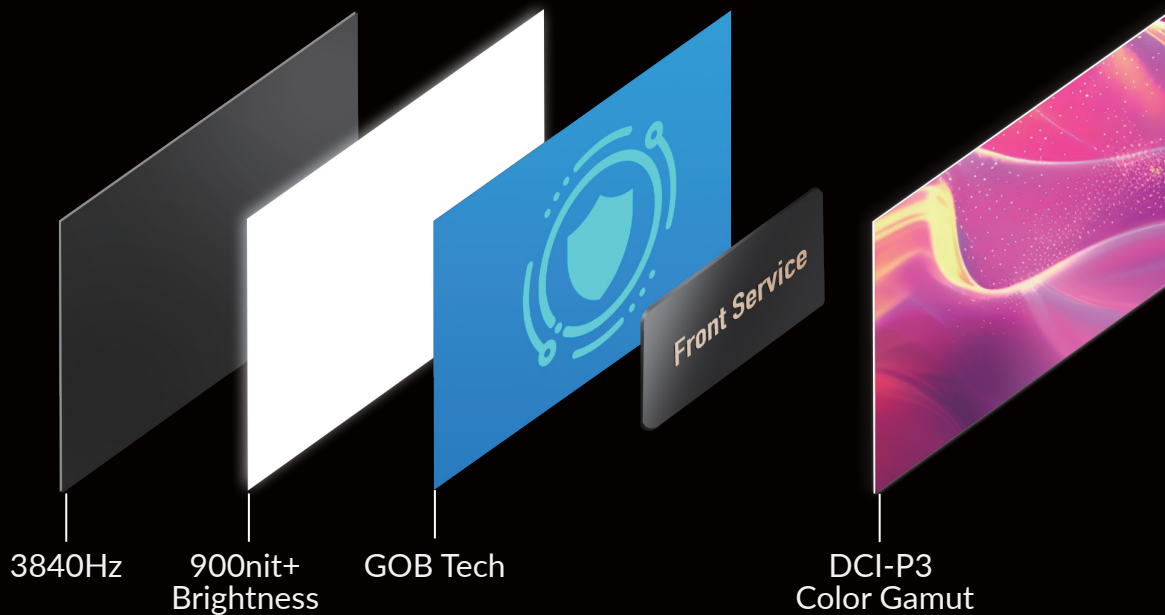

PRODUCT FEATURES

ADVANTAGES

- GOB Anti-Impact Technology
- Swivel casters For Instant Relocation
- Up to 900nit Brightness
- ETL / UL Approved
- Curved Fit, Spatial Harmony
- Lifetime Maintenance
- Plug & Play, Ready to go.
- 5-8 Year Warranty

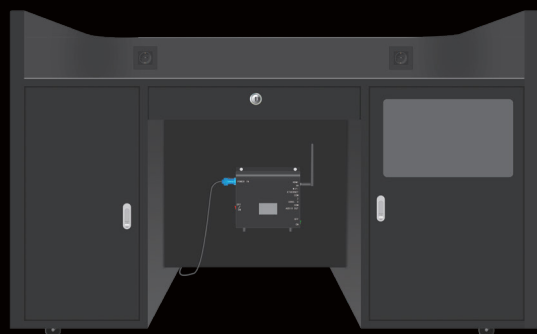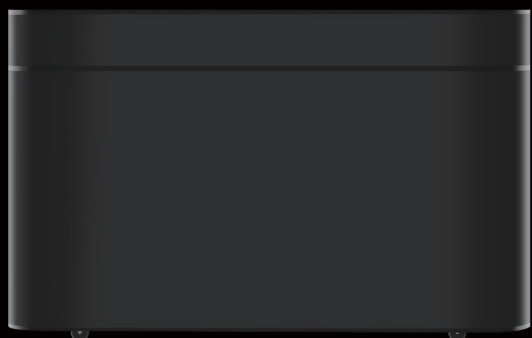

PRODUCT PARAMETERS

Model No.	1.2-GOB	1.8-GOB	2-GOB	2.5-GOB
Pixel Pitch(mm)	1.25	1.86	2	2.5
LED Type	SMD 1010	SMD 1212	SMD1515	SMD1515
Module Dimension(W*H)(mm)	320x 160			
Module Resolution(W*H)(Pixel)	256x 128	172x 96	160x80	128x64
Pixel Density(Pixel/m²)	640000	288906	250000	160000
Scan Mode(S)	62	43	40	32
Cabinet Dimension(W*H)(mm)	1920x960			
Counter size	1200x 600x 1050			
Cabinet Material	Iron			
Best Viewing Distance(m)	1.25	1.86	2	2.5
Brightness(nits)	900			
Ingress Protection(Front/Rear)	IP40			
Viewing Angle	H:140°V:140°			
Color Temperature	3200-9500K			
Gray Level	14-16bit			
Max Power Consumption(W/m²)	700			
Average Power Consumption(W/m²)	250			
Refresh Rate(Hz)	1920-3840			
Maintenance Method	Front Maintenance			
Operating Temperature	-20°C-60°C			
Operation Humidity	10%-95%HR			
Input Voltage	AC110-220V+15% 50/60Hz			
Life Time(Hours)	100000			

INDOOR CASES REFERENCE

